




C Y L I N D E R S

Standard 3000 PSI Welded Cross Tube Cylinders



FEATURES:

- 100% tested for quality assurance
- North American sourced seals for dependability
- Hard chrome rod plating for corrosion & wear resistance
- Cast steel end fittings for high strength & low cost
- Top port design
- SAE O-ring ports for reliable & leak-free connection
- Thread-in gland design for serviceability
- Grease zerk included for extended pin life
- High luster black paint for protection from the elements
- Individually bagged & boxed for secure storage & transport

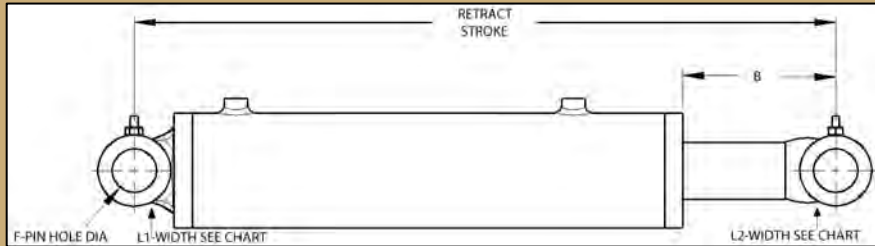

MODEL	BORE	PORTS	CROSS TUBE WIDTH		B	F
			L1-BASE END	L2-ROD END		
WWXT1500-S	1.5	SAE 4	2.25	2.00	2.62	3/4
WWXT2000-S	2.0	SAE 6	2.75	2.25	2.25	1
WWXT2500-S	2.5	SAE 8	3.25	2.25	2.25	1
WWXT3000-S	3.0	SAE 8	3.75	2.25	2.25	1
WWXT3500-S	3.5	SAE 8	4.25	2.25	4.00	1.25
WWXT4000-S	4.0	SAE 8	4.75	2.50	3.75	1.50

MODEL	BORE x STROKE			RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT1504-S	1.5	X	4	12	1	FULL PSI	8	109.41
WWXT1506-S	1.5	X	6	14	1	FULL PSI	9	114.70
WWXT1508-S	1.5	X	8	16	1	FULL PSI	10	119.91
WWXT1510-S	1.5	X	10	18	1	FULL PSI	11	125.11
WWXT1512-S	1.5	X	12	20	1	FULL PSI	13	130.22
WWXT1514-S	1.5	X	14	22	1	FULL PSI	14	135.42
WWXT1516-S	1.5	X	16	24	1	FULL PSI	15	140.71
WWXT1518-S	1.5	X	18	26	1	4800 (270 PSI)*	16	146.56
WWXT2004-S	2	X	4	12	1.25	FULL PSI	12	135.83
WWXT2006-S	2	X	6	14	1.25	FULL PSI	13	142.52
WWXT2008-S	2	X	8	16	1.25	FULL PSI	15	149.07
WWXT2010-S	2	X	10	18	1.25	FULL PSI	17	155.66
WWXT2012-S	2	X	12	20	1.25	FULL PSI	19	162.12
WWXT2014-S	2	X	14	22	1.25	FULL PSI	20	168.76
WWXT2016-S	2	X	16	24	1.25	FULL PSI	22	175.45
WWXT2018-S	2	X	18	26	1.25	FULL PSI	24	181.99
WWXT2020-S	2	X	20	28	1.25	FULL PSI	25	188.54
WWXT2024-S	2	X	24	32	1.25	7300 (2330 PSI)*	29	201.55
WWXT2030-S	2	X	30	38	1.25	4900 (1560 PSI)*	34	221.37
WWXT2032-S	2	X	32	40	1.25	4400 (1400 PSI)*	36	228.99
WWXT2036-S	2	X	36	44	1.25	3500 (1120 PSI)*	39	242.97
WWXT2504-S	2.5	X	4	12	1.50	FULL PSI	16	163.51
WWXT2506-S	2.5	X	6	14	1.50	FULL PSI	18	171.87
WWXT2508-S	2.5	X	8	16	1.50	FULL PSI	20	180.23
WWXT2510-S	2.5	X	10	18	1.50	FULL PSI	22	188.50
WWXT2512-S	2.5	X	12	20	1.50	FULL PSI	25	196.62
WWXT2514-S	2.5	X	14	22	1.50	FULL PSI	27	204.98
WWXT2516-S	2.5	X	16	24	1.50	FULL PSI	29	213.39
WWXT2518-S	2.5	X	18	26	1.50	FULL PSI	31	221.75
WWXT2520-S	2.5	X	20	28	1.50	FULL PSI	34	230.01
WWXT2524-S	2.5	X	24	32	1.50	FULL PSI	38	246.22
WWXT2530-S	2.5	X	30	38	1.50	10300 (2100 PSI)*	45	271.16
WWXT2532-S	2.5	X	32	40	1.50	9200 (1880 PSI)*	47	280.26
WWXT2536-S	2.5	X	36	44	1.50	7400 (1510 PSI)*	51	297.58

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.



C Y L I N D E R S

Standard 3000 PSI Welded Cross Tube Cylinders

MODEL	BORE x STROKE		RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT3004-S	3	X 4	12	1.5	FULL PSI	19	191.56
WWXT3006-S	3	X 6	14	1.5	FULL PSI	22	200.80
WWXT3008-S	3	X 8	16	1.5	FULL PSI	24	209.90
WWXT3010-S	3	X 10	18	1.5	FULL PSI	27	218.96
WWXT3012-S	3	X 12	20	1.5	FULL PSI	29	227.88
WWXT3014-S	3	X 14	22	1.5	FULL PSI	32	237.12
WWXT3016-S	3	X 16	24	1.5	FULL PSI	34	246.22
WWXT3018-S	3	X 18	26	1.5	FULL PSI	36	255.37
WWXT3020-S	3	X 20	28	1.5	20700 (2930 PSI)*	39	264.42
WWXT3024-S	3	X 24	32	1.5	15200 (2150 PSI)*	44	282.16
WWXT3030-S	3	X 30	38	1.5	10300 (1460 PSI)*	51	309.28
WWXT3032-S	3	X 32	40	1.5	9200 (1300 PSI)*	54	319.27
WWXT3036-S	3	X 36	44	1.5	7400 (1050 PSI)*	59	337.98
WWXT3040-S	3	X 40	48	1.5	6100 (860 PSI)*	63	355.96
WWXT3048-S	3	X 48	56	1.5	4400 (620 PSI)*	73	394.13
WWXT3508-S	3.5	X 8	18	1.75	FULL PSI	33	258.29
WWXT3510-S	3.5	X 10	20	1.75	FULL PSI	36	269.30
WWXT3512-S	3.5	X 12	22	1.75	FULL PSI	39	280.26
WWXT3514-S	3.5	X 14	24	1.75	FULL PSI	42	291.30
WWXT3516-S	3.5	X 16	26	1.75	FULL PSI	45	302.09
WWXT3518-S	3.5	X 18	28	1.75	FULL PSI	48	313.14
WWXT3520-S	3.5	X 20	30	1.75	FULL PSI	51	324.47
WWXT3524-S	3.5	X 24	34	1.75	26200 (2730 PSI)*	57	347.27
WWXT3530-S	3.5	X 30	40	1.75	18000 (1870 PSI)*	67	378.62
WWXT3532-S	3.5	X 32	42	1.75	16100 (1670 PSI)*	70	390.09
WWXT3536-S	3.5	X 36	46	1.75	13100 (1360 PSI)*	76	412.33
WWXT3540-S	3.5	X 40	50	1.75	10900 (1130 PSI)*	82	434.67
WWXT3548-S	3.5	X 48	58	1.75	7800 (810 PSI)*	94	478.18
WWXT4008-S	4	X 8	18	2	FULL PSI	41	311.84
WWXT4010-S	4	X 10	20	2	FULL PSI	45	325.96
WWXT4012-S	4	X 12	22	2	FULL PSI	49	338.91
WWXT4014-S	4	X 14	24	2	FULL PSI	52	351.82
WWXT4016-S	4	X 16	26	2	FULL PSI	56	364.55
WWXT4018-S	4	X 18	28	2	FULL PSI	60	377.60
WWXT4020-S	4	X 20	30	2	FULL PSI	63	390.55
WWXT4024-S	4	X 24	34	2	37200 (2960 PSI)*	71	416.47
WWXT4030-S	4	X 30	40	2	24900 (1980 PSI)*	82	454.82
WWXT4032-S	4	X 32	42	2	22400 (1780 PSI)*	85	467.78
WWXT4036-S	4	X 36	46	2	18100 (1440 PSI)*	93	493.83
WWXT4040-S	4	X 40	50	2	14600 (1160 PSI)*	100	519.98
WWXT4048-S	4	X 48	58	2	10600 (840 PSI)*	115	572.31
PMCK-WW1500	Packing Kit	1.5				1	25.00
PMCK-WW2000	Packing Kit	2				1	28.00
PMCK-WW2500	Packing Kit	2.5				1	34.00
PMCK-WW3000	Packing Kit	3				1	46.00
PMCK-WW3500	Packing Kit	3.5				1	54.00
PMCK-WW4000	Packing Kit	4				1	62.00

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.